

R.1.126 ⁷⁷
79. (New) A communication circuit comprising:
communications circuitry having an input and an output; and
a noise suppressor comprising:
an amorphous magnetic core; and
a bifilar winding around said amorphous magnetic core.

⁷⁸
80. (New) A noise suppressor assembly comprising:
a multiplicity of noise suppressors, at least one of said multiplicity of noise
suppressors including:
an amorphous magnetic core; and
a bifilar winding wound around said amorphous magnetic core.

a!
⁷⁹
81. (New) A noise suppressor assembly according to claim ⁷⁹80, and wherein said
multiplicity of noise suppressors includes at least first and second noise suppressors having
cores containing different amorphous magnetic materials.

⁸⁰
82. (New) A noise suppressor assembly comprising at least one noise suppressor
including:
a core including ferrite and an amorphous magnetic material; and
a bifilar winding wound around said core.

⁸¹
83. (New) A noise suppressor assembly according to claim ⁸⁰82, and wherein said at least
one noise suppressor comprises a multiplicity of noise suppressors including at least first and
second noise suppressors having cores containing different amorphous magnetic materials.

⁸²
84. (New) A wide band noise suppressor comprising:
a core assembly comprising a multiplicity of amorphous magnetic cores; and
a bifilar winding wound around said core assembly.

83
85. (New) A wide band noise suppressor comprising:
a core comprising a mixture of a plurality of different amorphous magnetic
materials; and
a bifilar winding wound around said core.

84
86. (New) A signal to interference enhancer comprising:
at least one passive analog circuit operative to decrease radio frequency
interference in a received signal; and
at least one active analog circuit operative to decrease radio frequency
interference in said received signal,
said at least one passive analog circuit and said at least one active analog
circuit being arranged in series for providing radio frequency signal to interference
enhancement to said received signal.

85
87. (New) A signal to interference enhancer according to claim 86, and wherein said at
least one active analog circuit comprises a subtraction circuit which cancels common mode
interference.

86
88. (New) A signal to interference enhancer according to claim 86, and wherein said at
least one passive analog circuit comprises a passive filter which reduces the amplitude of
common mode interference.

87
89. (New) A signal to interference enhancer according to claim 87, and wherein said at
least one passive analog circuit operates in a frequency range which is at least partially non-
overlapping with a frequency range of operation of said at least one active analog circuit.

88
90. (New) A signal to interference enhancer according to claim 88, and wherein said at
least one passive analog circuit operates in a frequency range which is at least partially non-

overlapping with a frequency range of operation of said at least one active analog circuit.

89
91. (New) A signal to interference enhancer according to claim 86, and wherein said at least one passive analog circuit is operative to reduce non-common mode interference due to imperfect balancing of first and second transmission lines by filtering the common mode interference.

90
92. (New) A signal to interference enhancer according to claim 87, and wherein said at least one passive analog circuit is operative to reduce non-common mode interference due to imperfect balancing of first and second transmission lines by filtering the common mode interference.

a'
cont 91
93. (New) A signal to interference enhancer according to claim 88, and wherein said at least one passive analog circuit is operative to reduce non-common mode interference due to imperfect balancing of first and second transmission lines by filtering the common mode interference.

92
94. (New) A signal to interference enhancer according to claim 89, and wherein said at least one passive analog circuit is operative to reduce non-common mode interference due to imperfect balancing of first and second transmission lines by filtering the common mode interference.

93
95. (New) A signal to interference enhancer according to claim 86, and wherein said at least one passive analog circuit comprises:
a low-pass EMI filter operative to attenuate interference at frequencies above a desired frequency pass band; and
a plurality of cascaded common mode chokes connected in series with said EMI filter, said common mode chokes being operative to attenuate interference at frequencies

within said desired frequency pass band.

94
96. (New) A signal to interference enhancer according to claim 95, and also comprising metallic barriers located at said filter and at said cascaded common mode chokes in order to reduce parasitic input to output interference coupling.

95
97. (New) A signal to interference enhancer according to claim 95, and wherein said plurality of cascaded common mode chokes include at least one choke comprising:
at least one core comprising a metal-based amorphous material and a ferrite material; and
at least one coil wound about said at least one core.

cont 96
98. (New) A signal to interference enhancer according to claim 97, and wherein said ferrite material comprises silicon steel permalloy.

97
99. (New) A signal to interference enhancer according to claim 97, and wherein said amorphous material has magnetic permeability between 20,000 - 100,000.

98
100. (New) A signal to interference enhancer according to claim 99, and wherein said magnetic permeability varies with changes in temperature between -30 C and 85 C by less than 5%.

99
101. (New) A signal to interference enhancer according to claim 97, and wherein said amorphous material has a saturation current of at least 5 Amperes.

100
102. (New) A signal to interference enhancer according to claim 97, and wherein said at least one core comprises separate core elements made of said metal-based amorphous material and of said ferrite material.

101

103. (New) A signal to interference enhancer comprising:

a low-pass EMI filter operative to attenuate interference at frequencies above a desired frequency pass band; and

a plurality of cascaded common mode chokes connected in series with said EMI filter, said common mode chokes being operative to attenuate interference at frequencies within said desired frequency pass band.

102

104. (New) A signal to interference enhancer according to claim 103, and wherein said plurality of cascaded common mode chokes include

at least one choke comprising at least one core comprising a metal-based amorphous material and a ferrite material; and

at least one coil wound about said at least one core.

a
cont 103

105. (New) A signal to interference enhancer according to claim 104, and wherein said ferrite material comprises silicon steel permalloy.

104

106. (New) A signal to interference enhancer according to claim 104, and wherein said amorphous material has magnetic permeability between 20,000 - 100,000.

105

107. (New) A signal to interference enhancer according to claim 106, and wherein said magnetic permeability varies with changes in temperature between -30 C and 85 C by less than 5%.

106

108. (New) A signal to interference enhancer according to claim 104, and wherein said amorphous material has a saturation current of at least 5 Amperes.

107

109. (New) A signal to interference enhancer according to claim 104, and wherein said at least one core comprises separate core elements made of said metal-based amorphous

material and of said ferrite material.

108/110. (New) A signal to interference enhancer according to claim 103, and also comprising metallic barriers located at said filter and at said cascaded common mode chokes in order to reduce parasitic input to output interference coupling.

109/111. (New) A signal to interference enhancer embodied in a circuit package and comprising:

a low-pass EMI filter operative to attenuate interference at frequencies above a desired frequency pass band;

a plurality of cascaded common mode chokes connected in series with said EMI filter, said common mode chokes being operative to attenuate interference at frequencies within said desired frequency pass band; and

metallic barriers located at said filter and at said cascaded common mode chokes in order to reduce parasitic input to output interference coupling.

110/112. (New) A communication noise suppressing method comprising:
providing a communications circuitry having an input and an output;
providing an amorphous magnetic core;
winding a bifilar winding around said amorphous magnetic core and in series with at least one of said communications circuitry input and communications circuitry output; and
passing a communication signal from said input, through said bifilar winding and to said output for suppressing noise in said communication signal.

111/113. (New) A noise suppressing method comprising:
providing a multiplicity of magnetic cores, at least one of said multiplicity of magnetic cores comprising an amorphous magnetic core;
winding a bifilar winding around each of said plurality of magnetic cores;

connecting said bifilar windings in series; and
passing a signal through said bifilar windings for suppressing noise in said signal.

112
114. (New) A noise suppressing method comprising:
providing at least one core including ferrite and an amorphous magnetic material;
winding a bifilar winding around said at least one core; and
passing a signal through said bifilar winding for suppressing noise in said signal.

113
115. (New) A noise suppressing method according to claim 113, and wherein said at least one
core comprises a multiplicity of cores including at least first and second cores containing
different amorphous magnetic materials.

a
cont
114
116. (New) A wide band noise suppressing method comprising:
providing a core assembly comprising a multiplicity of amorphous magnetic
cores;
winding a bifilar winding wound around said core assembly; and
passing a signal through said bifilar winding for suppressing noise in said signal.

115
117. (New) A wide band noise suppressing method comprising:
providing a core comprising a mixture of a plurality of different amorphous
magnetic materials;
winding a bifilar winding wound around said core; and
passing a signal through said bifilar winding for suppressing noise in said signal.

116
118. (New) A signal to interference enhancing method comprising:
providing at least one passive analog circuit operative to decrease radio frequency
interference in a received signal;
providing at least one active analog circuit operative to decrease radio frequency

interference in said received signal;

arranging said at least one passive analog circuit and said at least one active analog circuit in series; and

passing a radio frequency signal through said passive analog circuit and said active analog circuit for enhancing said signal to interference therein.

~~117~~ 119. (New) A signal to interference enhancing method according to claim 118, and wherein said at least one active analog circuit cancels common mode interference.

~~118~~ 120. (New) A signal to interference enhancing method according to claim 118, and wherein said at least one passive analog circuit reduces the amplitude of common mode interference.

a'
cont ~~119~~ 121. (New) A signal to interference enhancing method according to claim 118, and wherein said at least one passive analog circuit operates in a frequency range which is at least partially non-overlapping with a frequency range of operation of said at least one active analog circuit.

~~120~~ 122. (New) A signal to interference enhancing method according to claim 120, and wherein said at least one passive analog circuit operates in a frequency range which is at least partially non-overlapping with a frequency range of operation of said at least one active analog circuit.

~~121~~ 123. (New) A signal to interference enhancing method according to claim 118, and wherein said at least one passive analog circuit is operative to reduce non-common mode interference due to imperfect balancing of first and second transmission lines by filtering the common mode interference.

~~122~~ 124. (New) A signal to interference enhancing method according to claim 119, and wherein said at least one passive analog circuit is operative to reduce non-common mode interference due to imperfect balancing of first and second transmission lines by filtering the common mode

interference.

123

125. (New) A signal to interference enhancing method according to claim 120, and wherein said at least one passive analog circuit is operative to reduce non-common mode interference due to imperfect balancing of first and second transmission lines by filtering the common mode interference.

124

126. (New) A signal to interference enhancing method according to claim 121, and wherein said at least one passive analog circuit is operative to reduce non-common mode interference due to imperfect balancing of first and second transmission lines by filtering the common mode interference.

ai!
cont

125

127. (New) A signal to interference enhancing method according to claim 118, and wherein said at least one passive analog circuit employs an EMI filter to attenuate interference at frequencies above a desired frequency pass band and employs a plurality of cascaded common mode chokes connected in series with said EMI filter to attenuate interference at frequencies within said desired frequency pass band.

126

128. (New) A signal to interference enhancing method according to claim 127, and also comprising employing metallic barriers located at said filter and at said cascaded common mode chokes to reduce parasitic input to output interference coupling.

127

129. (New) A signal to interference enhancing method according to claim 128, and wherein said at least one core comprises separate core elements made of said metal-based amorphous material and of said ferrite material.

128

130. (New) A signal to interference enhancing method comprising:
employing a low-pass EMI filter to attenuate interference above a desired

frequency pass band;

employing a plurality of cascaded common mode chokes connected in series with said EMI filter to attenuate interference at frequencies within said desired frequency pass band; and

passing a signal through said low-pass EMI filter and said plurality of cascaded common mode chokes for suppressing noise in said signal.

129

131. (New) A signal to interference enhancing method according to claim 130, and also comprising metallic barriers located at said filter and at said cascaded common mode chokes in order to reduce parasitic input to output interference coupling.

a 130
cont

132. (New) A signal to interference enhancing method comprising:
employing a low-pass EMI filter to attenuate interference at frequencies above a desired frequency pass band;

employing a plurality of cascaded common mode chokes connected in series with said EMI filter to attenuate interference at frequencies within said desired frequency pass band; and

employing metallic barriers located at said filter and at said cascaded common mode chokes to reduce parasitic input to output interference coupling.

131

133. (New) A signal to interference enhancer according to claim 97, and wherein said amorphous material comprises at least one of cobalt and nickel.

132

134. (New) A signal to interference enhancer according to claim 104, and wherein said amorphous material comprises at least one of cobalt and nickel.

133

135. (New) A noise suppressor comprising:
an amorphous magnetic core; and

a bifilar winding wound around said amorphous magnetic core, and
wherein said amorphous magnetic core has a closed E shape.

134

136. (New) A communication circuit according to claim 79, and wherein said amorphous magnetic core has a toroidal shape.

135

137. (New) A communication circuit according to claim 79, and wherein said amorphous magnetic core has a closed E shape.

136

138. (New) A noise suppressor according to claim 84, and wherein said amorphous magnetic core has a toroidal shape.

a!
cont

139. (New) A noise suppressor according to claim 84, and wherein said amorphous magnetic core has a closed E shape.

138

140. (New) A noise suppressor according to claim 85, and wherein said amorphous magnetic core has a toroidal shape.

139

141. (New) A noise suppressor according to claim 85, and wherein said amorphous magnetic core has a closed E shape.

140

142. (New) A signal to interference enhancer comprising:

at least one passive analog circuit operative to decrease radio frequency interference in a received signal; and

at least one active analog circuit operative to decrease radio frequency interference in said received signal,

said at least one passive analog circuit and said at least one active analog circuit being arranged in series for providing radio frequency signal to interference enhancement to said received signal; and

said at least one active analog circuit operative to interface with a modem.

141

143. (New) A signal to interference enhancer comprising:

at least one passive analog circuit operative to decrease radio frequency interference in a received signal; and

at least one active analog circuit operative to decrease radio frequency interference in said received signal,

said at least one passive analog circuit and said at least one active analog circuit being arranged in series for providing radio frequency signal to interference enhancement to said received signal; and

said at least one active analog circuit operative to interface with an A/D converter.

a!
cont

142

144. (New) A signal to interference enhancing repeater comprising:

a first passive analog circuit operative to decrease radio frequency interference in a received signal;

at least one active analog circuit operative to decrease radio frequency interference in said received signal; and

a second passive analog circuit operative to decrease radio frequency interference in a received signal,

said first passive analog circuit and said active analog circuit and said second passive analog circuit being arranged in series for providing radio frequency signal to interference enhancement to said received signal.; and

said at least one active analog circuit operative as an analog repeater

143

145. (New) A signal to interference enhancer comprising:

at least one passive analog circuit comprising a differential input and operative to decrease radio frequency interference in a received signal; and

at least one active analog circuit comprising a single-ended output and operative to decrease radio frequency interference in said received signal,

said at least one passive analog circuit and said at least one active analog circuit being arranged in series for providing radio frequency signal to interference enhancement to said received signal; and wherein said differential input serves as the input of the cascaded circuit and said single-ended output serves as the output of the cascaded circuits.

144

146. (New) A signal to interference enhancer comprising:

at least one passive analog circuit operative to decrease radio frequency interference in a received signal; and

at least one active analog circuit operative to decrease radio frequency interference in said received signal,

said at least one passive analog circuit and said at least one active analog circuit being arranged in series for providing radio frequency signal to interference enhancement to said received signal; and

the first said of at least one passive analog circuit comprising a differential input and the last of said at least one active analog circuit comprising a single-ended output.

145

147. (New) A signal to interference enhancer comprising:

at least one passive analog circuit operative to decrease radio frequency interference in a received signal; and

at least one active analog circuit operative to decrease radio frequency interference in said received signal,

said at least one passive analog circuit and said at least one active analog circuit being arranged in series for providing radio frequency signal to interference enhancement to said received signal; and

the first of said at least one passive analog circuit comprising a single-ended input
and the last of said at least one active analog circuit comprising a single-ended output.

146

148. (New) A signal to interference enhancer comprising:

at least one passive analog circuit operative to decrease radio frequency
interference in a received signal; and

at least one active analog circuit operative to decrease radio frequency interference
in said received signal,

said at least one passive analog circuit and said at least one active analog circuit
being arranged in series for providing radio frequency signal to interference enhancement to said
received signal; and

the first of said at least one passive analog circuit comprising a single-ended input
and the last of said at least one active analog circuit comprising a differential output.

147

149. (New) A signal to interference enhancer comprising:

at least one passive analog circuit operative to decrease radio frequency
interference in a received signal; and

at least one active analog circuit operative to decrease radio frequency interference
in said received signal,

said at least one passive analog circuit and said at least one active analog circuit
being arranged in series for providing radio frequency signal to interference enhancement to said
received signal; and

said at least one active analog circuit operative to interface with an XDSL modem.

148

150. (New) A noise suppressing transformer assembly comprising:

at least one noise suppressor comprising:

an amorphous magnetic core; and

a bifilar winding wound around said amorphous magnetic core; and

a transformer comprising:

at least one core comprising at least a ferrite material; and

at least one coil wound about said at least one core,

said at least one noise suppressor and said transformer being arranged in series.

149

151. (New) A signal to interference enhancer embodied in a circuit package and comprising:
a low-pass EMI filter operative to attenuate interference at frequencies above a
desired frequency pass band; and

a plurality of cascaded common mode chokes connected in series with said EMI
filter, said common mode chokes being operative to attenuate interference at frequencies within
said desired frequency pass band,

each of said low-pass EMI filter and said plurality of cascaded common mode
chokes being contained in a separate metallic enclosure.

150

152. (New) A signal to interference enhancer embodied in a circuit package and comprising:
a low-pass EMI filter operative to attenuate interference at frequencies above a
desired frequency pass band; and

a plurality of cascaded common mode chokes connected in series with said EMI
filter, said common mode chokes being operative to attenuate interference at frequencies within
said desired frequency pass band,

said plurality of cascaded common mode chokes being contained in a metal
enclosure and said EMI filter being embodied in a feed-through device inserted in a wall of said
enclosure.

151

153. (New) A transformer comprising:

at least one core comprising at least one of metal-based amorphous material and

a ferrite material;

at least one coil wound about said at least one core; and

at least one aluminum foil shield wound around at said least one coil.

152

154. (New)

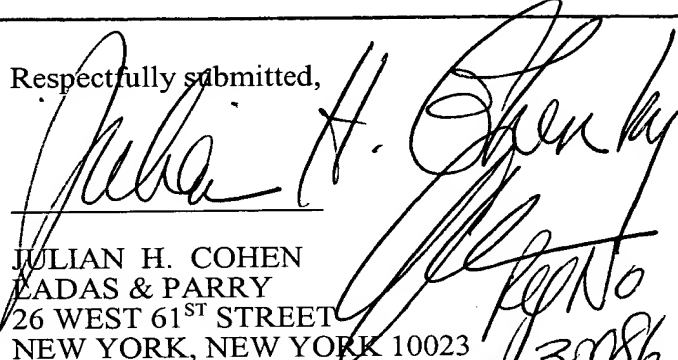
A noise suppressor embodied in a circuit package comprising:

an amorphous magnetic core;

a bifilar winding wound around said amorphous magnetic core, said bifilar winding comprising an input portion and an output portion; and

a metallic barrier located across said amorphous magnetic core and between said input portion and said output portion in order to reduce parasitic input to output interference coupling.

Respectfully submitted,


JULIAN H. COHEN
EADAS & PARRY
26 WEST 61ST STREET
NEW YORK, NEW YORK 10023

Reg No
30086